

# PBFT

## Peel Back Force Tester



GPD's Peel Back Force Tester with FORCEWare™ software is being used to set peel back standards for the entire industry

**GPD Global**®

611 Hollingsworth Street, Grand Junction, CO 81505  
tel: +1.970.245.0408 • fax: +1.970.245.9674 • email: request@gpd-global.com • web: www.gpd-global.com

# Proven Peel Back Force Measurement

Supplying consistent SMT carrier packaging is critical for customers using SMT pick-and-place machines. Nothing will stop a production line faster than carrier cover tape that doesn't peel back properly. The problem is difficult because tape cover adhesive varies widely from supplier to supplier.

In short, correctly measuring, setting up, recording, and then analyzing carrier tape peel back force is a critical production step. That's why you need GPD's Peel Back Force Tester (PBFT) with FORCEWare™ software. **This is the equipment judged so good it was used to set the peel back force standard for the entire industry.**



When you manage adhesive peel back force properly...



...you automatically take a big step toward improving customer satisfaction

## Installation and Set Up

Configuration of the PBFT is quick and easy using the PBFT calibration dial and the strain gauge calibration screen.

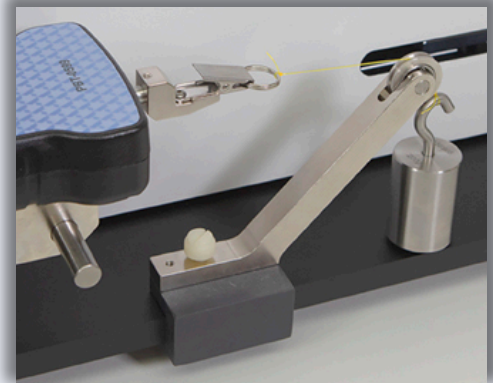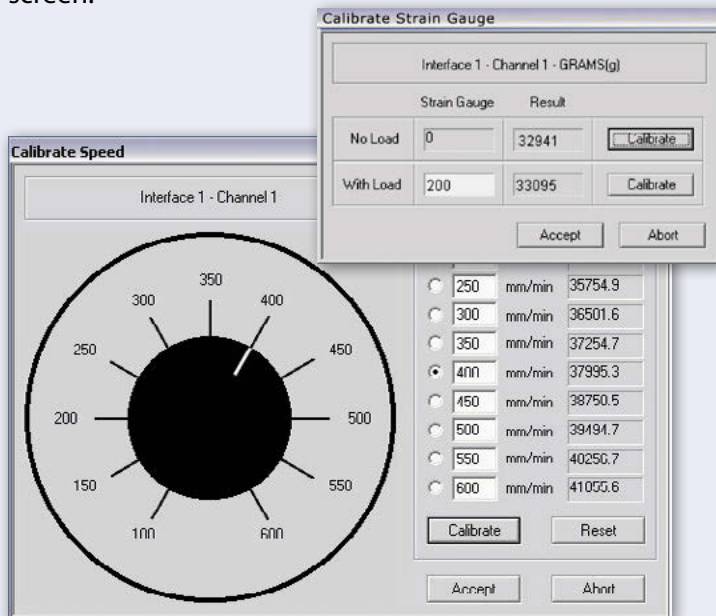

## Strain Gauge Verification Kit

This optional kit makes it easy to verify strain gauge calibration and meet ISO requirements for calibrated equipment.

Kit PBT-123 includes 20, 50, 100, & 200g weights, 90-degree pulley arm.

# GPD's FORCEWare™ Software lets you interface directly with your computer

GPD Global Peel Back Force Tester



Desktop PC



Notebook PC



or

and


via USB connection

## FORCEWare™ Software

FORCEWare™ software allows the user to see, analyze, and record minimums, maximums, and average peel back force and speed, as well as standard deviation. GPD Global's FORCEWare™ Software with comprehensive SPC Software Package makes testing and evaluation quick, easy, and accurate.


## SPC Analysis

When sufficient SPC data has accumulated, it can be analyzed with any of the various window interfaces shown in the samples here. All you have to do is select the file to be analyzed, a data range, and the type of graph desired. Then simply print out or display the output. (see next page)

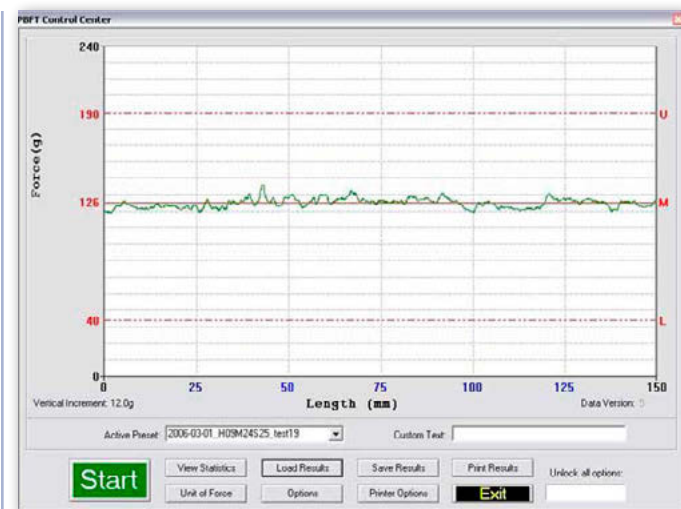

## PBFT Control Center Window

The PBFT Control Center Window is used to define test parameters and unit of measure, run a test, and view, print, and save results. This window is also used to view and compare prior test results.

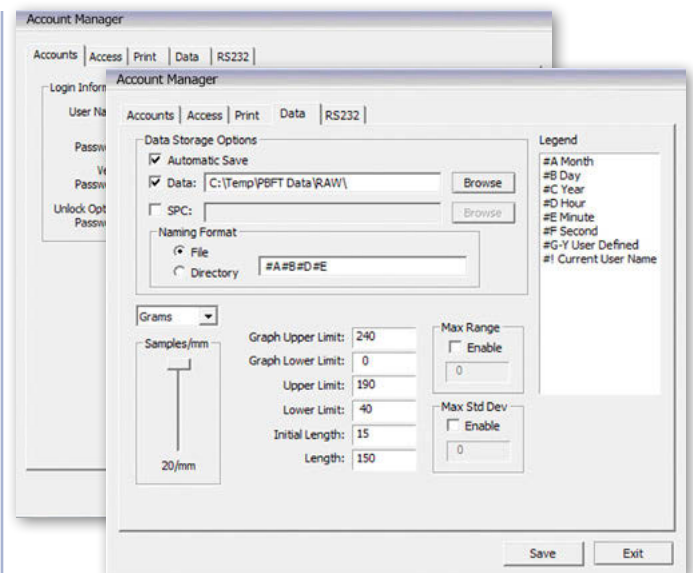


## SPC User Creation Window

In addition to generating SPC data reports, the operator can also create separate log-in accounts, as well as implementing vendor defaults. Security features prevent unauthorized tampering.

# • Control • Information • More Efficient Production

## Test Graph

When a peel back force test begins, its progress displays on the test graph. Upon test completion, specific and summary data are displayed in a Test Results window. Many different graph forms can then be generated.

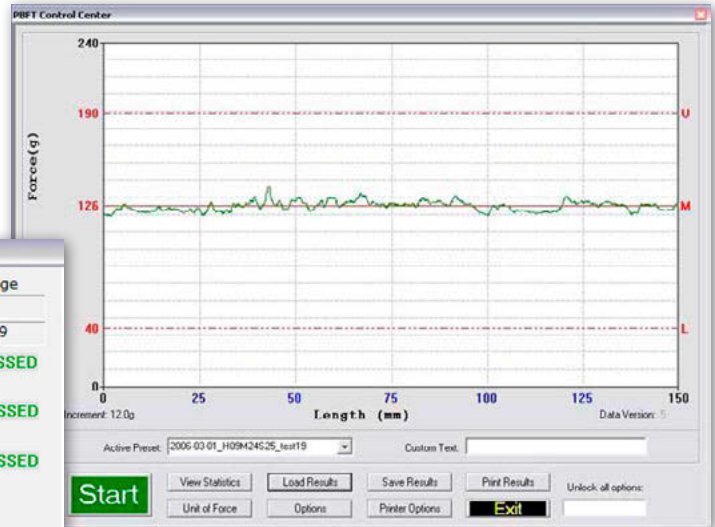

## Current Results Chart


Displays complete results of test. Results can be saved and reviewed.

|                     | Max     | Min    | Range |        |
|---------------------|---------|--------|-------|--------|
| Limit:              | 190     | 40     | 150   |        |
| Result:             | 141.34  | 104.35 | 36.99 |        |
| Speed:              | 600     |        |       | PASSED |
| Mean:               | 116.194 |        |       | PASSED |
| Standard Deviation: | 5.263   |        |       | PASSED |
| Std. Dev. Limit:    | 10.000  |        |       |        |
| Data Range:         | 36.99   |        |       | PASSED |
| Data Range Limit:   | 200.00  |        |       |        |

## FORCEWare™ Software with SPC Software Package Runs on Windows 10 Pro/ 11 Pro


Now the most accurate method of testing is also the easiest and fastest. With easy to use, point-and-click windows, initial set up is a breeze, and calibration routines for both speed and force are practically automatic. SPC analysis allows the operator to select the files to be analyzed, and pick the appropriate analysis tools. Analysis, and all management results can be printed out for further study or distribution.

- Simplified calibration routine for speed and force
- Selectable sampling rate
- Bright, clear, easy-to-read screens
- Large storage capability for test data, test graphics, and SPC data

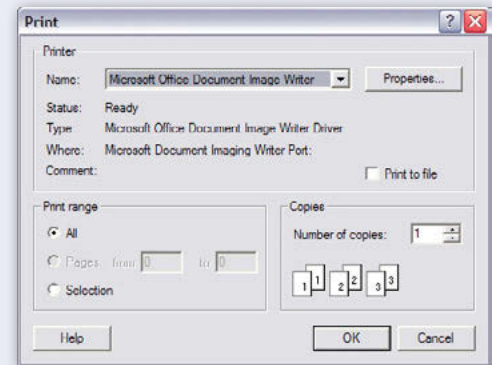

## SPC Reports and Labels

SPC test results can be printed in SPC data, line graph, and label formats. The user can control the overall dimensions for all of these formats. User-defined print can also be added at the bottom of the SPC data and line graphs reports.

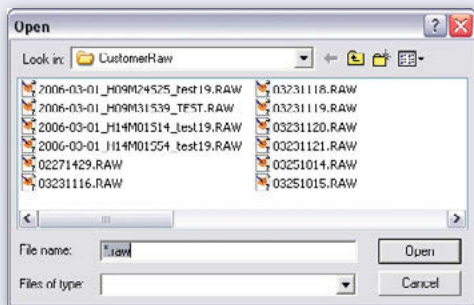


## Previous Results Chart

This display is used to load previous results and past tests, in addition to generating additional results output.

## S-Chart, X-Bar Chart, R Chart, and Cpk




Displays trends in spread of standard deviation, mean, range, and Cpk.

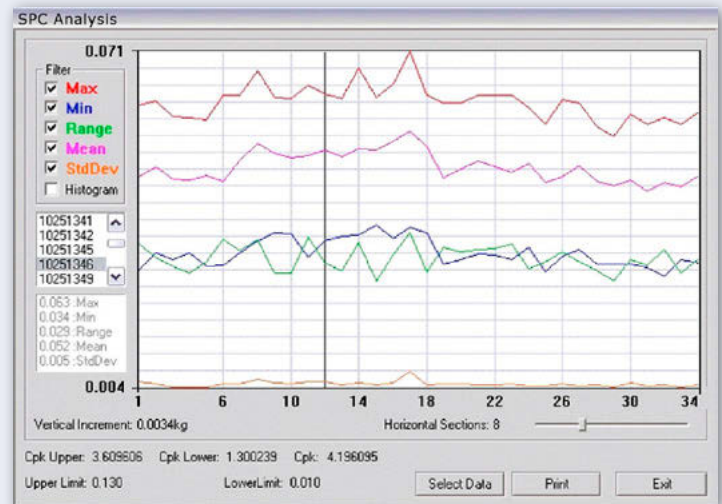



# Features

of the variable speed Peel Back Force Tester with FORCEWare™ software package

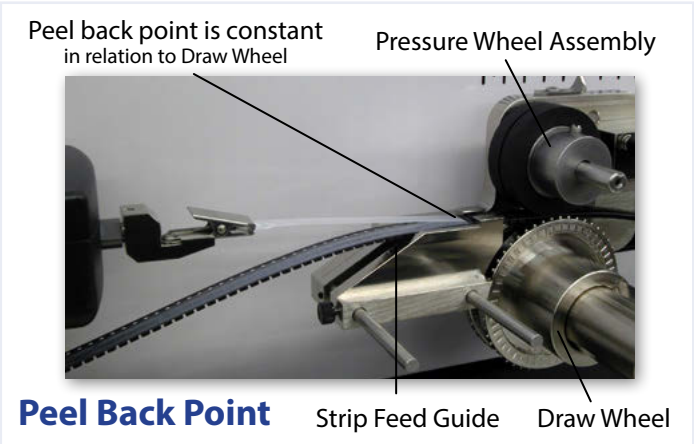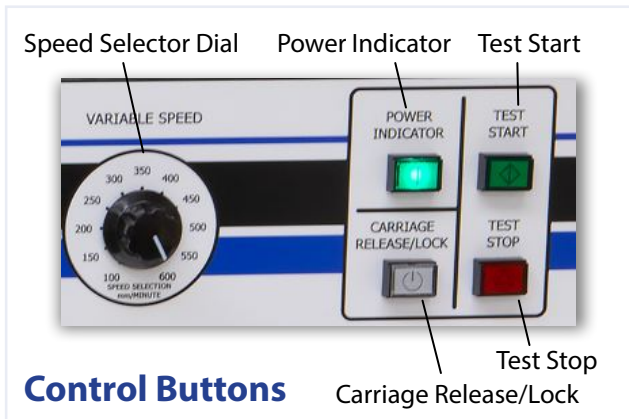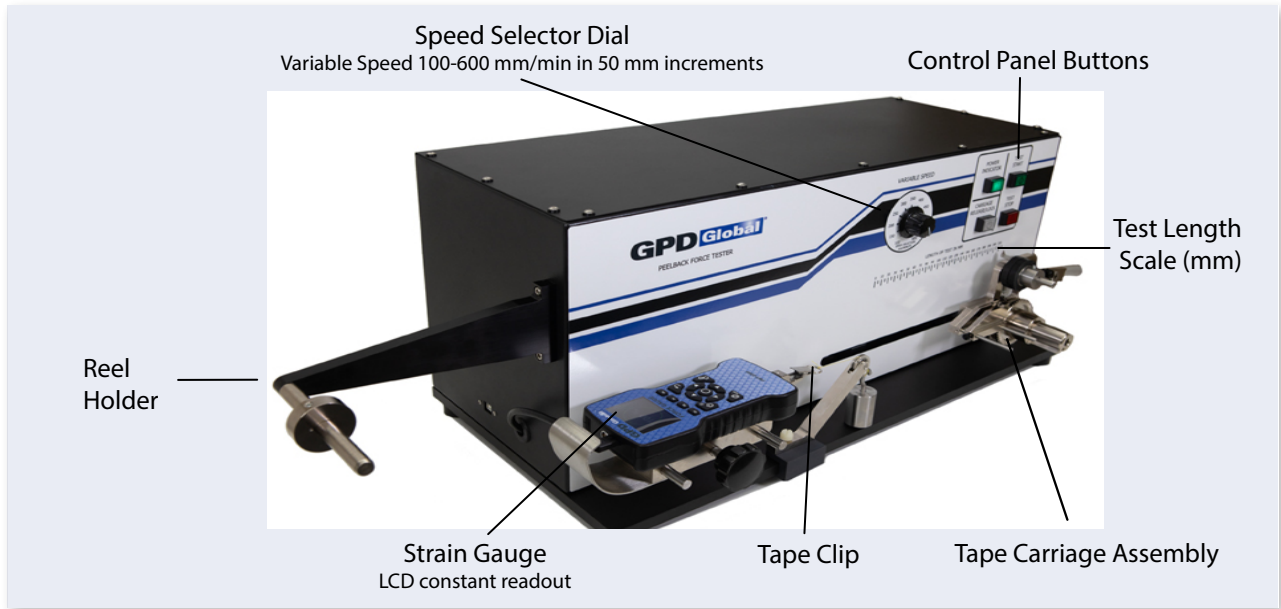

- IEC (Europe)
- EIA-J (Japan, Asia)
- EIA (North America): EIA-481-E
- European CE Safety Standards

**Built in Compliance with:**

Applicable Directives:

2014/35/EU Low Voltage Directive (LVD)  
Laws for electrical equipment within certain voltage limits

2014/30/EU Electromagnetic Compatibility Directive (EMC)  
Conformity is declared to Annex I and II (EMC) 2014/30/EU  
Laws relating to electrical magnetic compatibility

2006/42/EC Machine Directive - 1st Edition - December 2009  
Conformity is declared to Annex I and II (EMC) 2014/30/EU  
Laws relating to machinery



Applicable Standards:

IEC 61010-1:2010+AMD1:2016 CSV  
Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1:General requirements.

**DESKTOP or NOTEBOOK Capability**

Model PBFTVS.USB1100 includes a Tape Peel Back Force Tester with GPD Global's FORCEWare™ software and SPC for Windows 10 Pro/11 Pro for use on a desktop or notebook computer utilizing USB specification 2.0 or greater.

**Specifications**

- Peel Back . . . . . Force Measuring Range . . . 0 - 250 grams  
Speed. . . . . 100 - 600 ± 5 mm/minute in 50 mm increments  
Angle . . . . . 160 - 180 degrees  
Accuracy after Calibration . . . ± 1.0% of Full Scale (equals 2.5 grams)
- Tape . . . . . Widths Accepted (mm) . . . 8, 12, 16, 24, 32, 44, & 56 (optional 8 to 120 mm)  
Materials Accepted . . . . . Plastic, Paper, Metal  
Configurations . . . . . Single or Dual Sprocket
- Power . . . . . AC Input Voltage . . . . . 100 VAC - 240 VAC  
AC Frequency . . . . . 50/60 Hz  
Consumption . . . . . 60 watts maximum  
Fuses, Input power module 1 amp, 250 volts  
Fuse, Power supply . . . . . 2 amps, 250 volts
- Physical . . . . . Dimensions . . . . . 31.8 cm H x 73.7 cm W x 36.8 cm D (12.5" H x 29.0" D x 14.5" W)  
Weight . . . . . 30.8 kg (68 lbs)
- Strain Gauge . . . . . Accuracy . . . . . ± 0.20% of full scale  
Data Sampling Rate . . . . . Up to 20 samples per second, selectable from FORCEWare™ Software  
Battery life (approximate) . . . 30 hours, continuous use (strain gauge is normally plugged into the PBFT)  
Certification . . . . . Calibration norms comply with ISO 10012 and ANSI Z540-1  
Capacity is 2 lbf x 0.001 lbf with accuracy limits at ± 0.20% of full scale ± 1 LSC
- FORCEWare™ Software . Test Range-SPC Analysis . . . User-defined range  
Test Range-Data Collection . . . Uses minimum/maximum limits of first file in selected data set  
Print Options . . . . . SPC data, Label format, Line Graph format

**Customer-Provided Computer Requirements**

- Computer . . . . . Desktop or Notebook (minimum requirements are dictated by the operating system in use) with 1 available USB 2.0 compatible port.
- Operating System . . . . . Microsoft Windows 10 Pro/11 Pro, 32-bit or 64-bit
- Memory . . . . . 1 GB recommended for 32-bit. 2 GB recommended for 64-bit.
- Printer . . . . . Any printer supported by the operating system in use.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.



\* Specifications are subject to change without notice

Rev. 04/2024